

acecube

versatile

Model (ACV-3000L / 792G)

The AceCube Versatile ACV-3000L/792G is designed for the safe and secure transporting and storage of various industrial lubricants and hazardous liquids worldwide.



Specifications

	Metric	US	Imperial
Capacity	2888 Litres	763 Gallons	635 Gallons
Length	2300 mm	90 8/16"	90 8/16"
Width	1985 mm	78 2/16"	78 2/16"
Height	1296 mm	51"	51"
Outer Tank Thickness	3 mm	1/16"	1/16"
Inner Tank Thickness	4 mm	2/16"	2/16"
Weight, Tare	1137 kg	2506 lbs, 10oz	2506 lbs, 10oz
Weight, Laden	3967 kg	8745 lbs, 12 oz	8745 lbs, 12 oz
Safe Fuel Fill Level	2744 Litres	725 Gallons	605 Gallons


Approvals and Certifications

UK & Europe

- ✓ Trade Mark Certificate Europe
- ✓ Trade Mark Certificate UK
- ✓ (IBC) Intermediate Bulk Containment
- ✓ UN 31 A/Y
- ✓ Adhering to ADR regulations
- ✓ Lifting when Full Certified
- ✓ PPG2 & PPG26
- ✓ Vibration Tested
- ✓ UL142
- ✓ ULCS601-14
- ✓ Patent no: GB2502198

USA & Canada

- ✓ (IBC) Intermediate Bulk Containment
- ✓ TSSA B1390 DN - 2006 (Optional)
- ✓ UN 31 A/Y
- ✓ DOT USA
- ✓ DOT Canada
- ✓ Lifting when Full Certified
- ✓ Vibration Tested
- ✓ UL142
- ✓ ULCS601-14
- ✓ Patent no: GB2502198

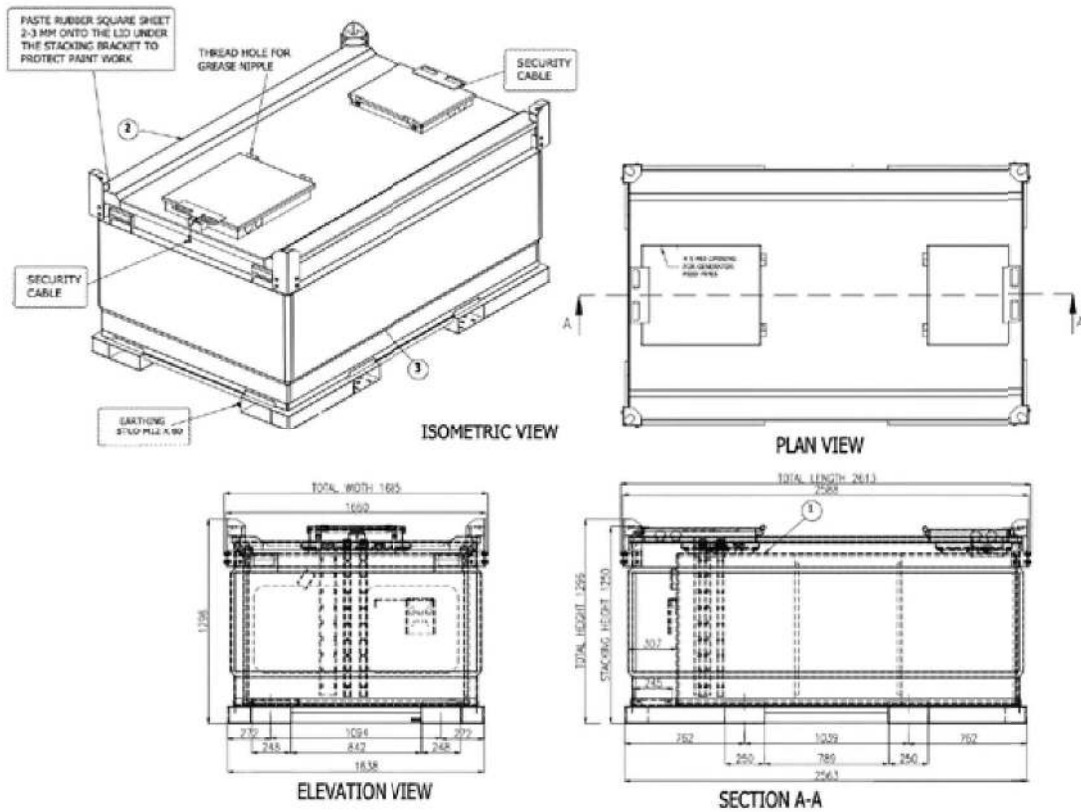

The range has an extra large equipment compartment area that can house a variety of accessories.



DISPENSING NOZZLE VARIATIONS



HOSES WITH ISO QUICK RELEASE COUPLERS



UP TO 10M OR 32FT RETRACTABLE HOSE REELS



DIGITAL FLOW METERS



ENGINE DRIVEN OR ELECTRIC PUMPS



IN LINE PARTIAL SEPARATION FILTERS